
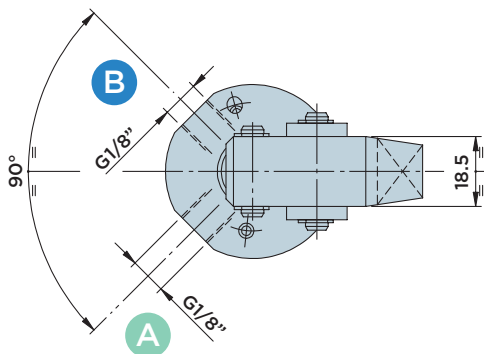
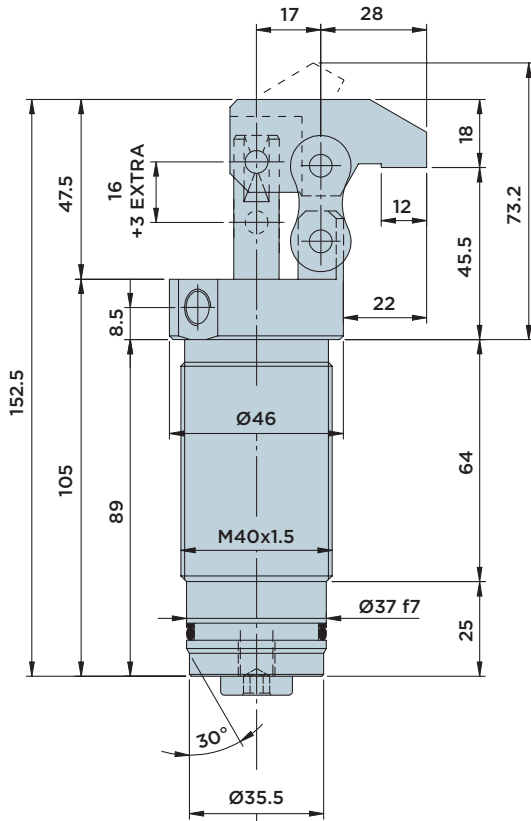


CGF40.0 D

DOUBLE-ACTING **LINK CLAMP CYLINDER**


MAX. OPERATING PRESSURE = 200BAR



Options:

- Upon request, different clamp arm types can be manufactured to customer specification, mounted and commissioned.
- The link clamp cylinder can also be ordered without clamp arm (order no. CGF40.ODN)

INSTALLATION EXAMPLE

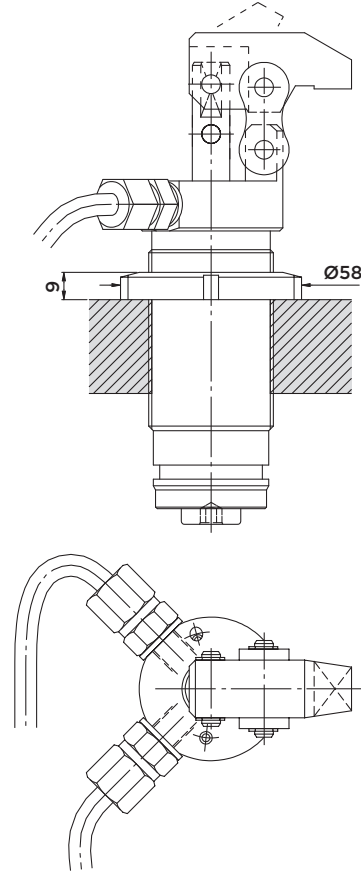

Included in the scope of supply:

- Ring nut M40x1.5.

Available upon request:

A second M40x1.5 ring nut for mounting in unthreaded through-holes can additionally be delivered.

Material:

- Piston/rod/bolts: Case-hardened steel, ground.
- Body: Free machining steel, nitrocarburized.
- Connecting link: Commercial type.
- Clamp arm: C45.

STROKE mm	EFFECTIVE PISTON AREA		TOTAL OIL VOLUME	
	Cm ²		Cm ³	
	CLAMP.	UNCLAMP.	CLAMP.	UNCLAMP.
TOTAL 19	4.91	3.78	9.3	7.2



HYDROBLOCK



CGF40.0 S

SINGLE-ACTING **LINK CLAMP CYLINDER**

MAX. OPERATING PRESSURE = 200BAR

A : Clamping


B : Venting

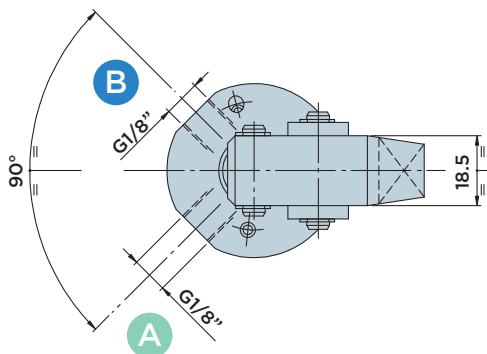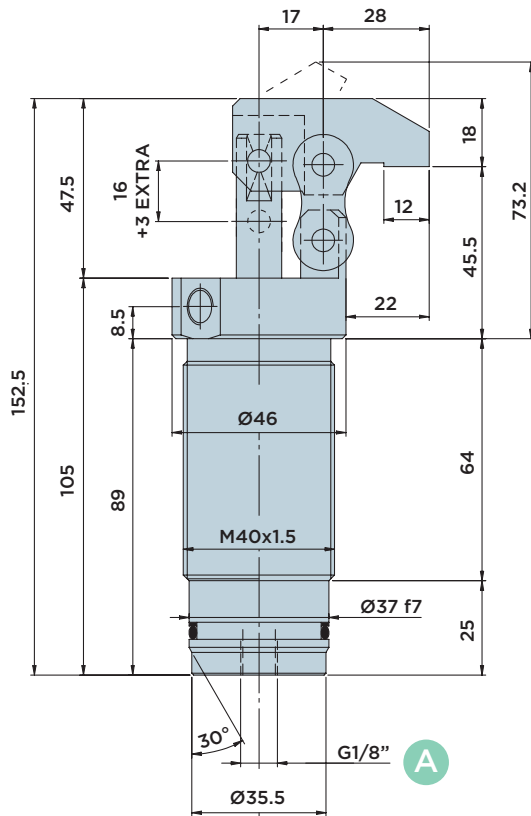

Options:

- Upon request, different clamp arm types can be manufactured to customer specification, mounted and commissioned.
- The link clamp cylinder can also be ordered without clamp arm (order no. CGF40.OSN).

INSTALLATION DIMENSIONS

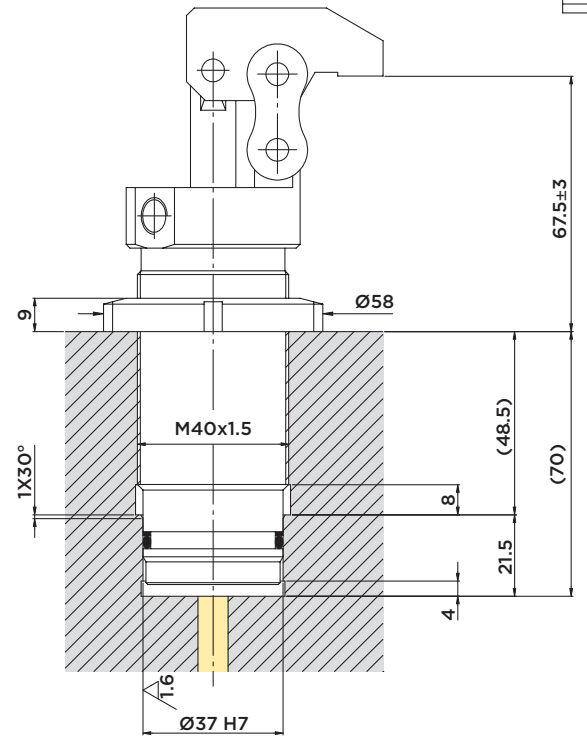

Included in the scope of supply:

- Ring nut M40x1.5.

Available upon request:

A second M40x1.5 ring nut for mounting in unthreaded through-holes can additionally be delivered.

Material:

- Piston/rod/bolts: Case-hardened steel, ground.
- Body: Free machining steel, nitrocarburized.
- Connecting link: Commercial type.
- Clamp arm: C45.

STROKE mm	EFFECTIVE PISTON AREA	TOTAL OIL VOLUME
		Cm ²
TOTAL 19	CLAMP	CLAMP
	4.91	9.3