IRFP 16SD

HYDRAULIC WORK SUPPORT WITH **UPPER FLANGE DOUBLE-ACTING**

MAX. OPERATING PRESSURE = 350BAR

A : Extension + Clamping

B : Retraction



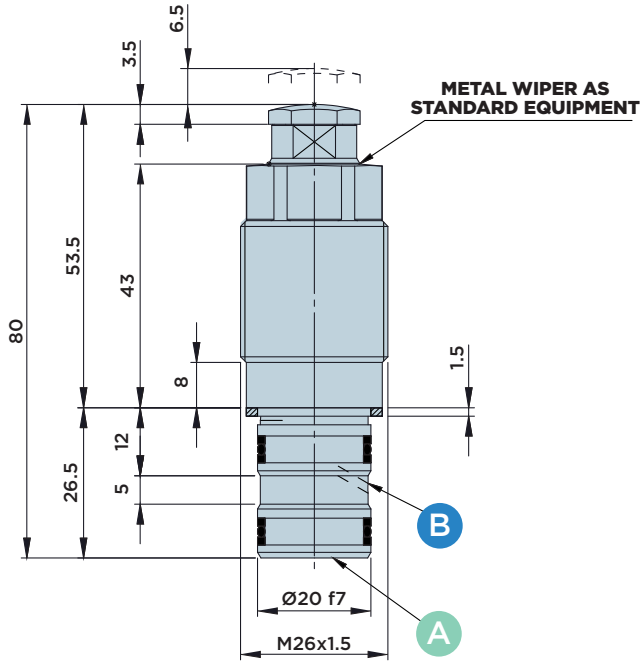

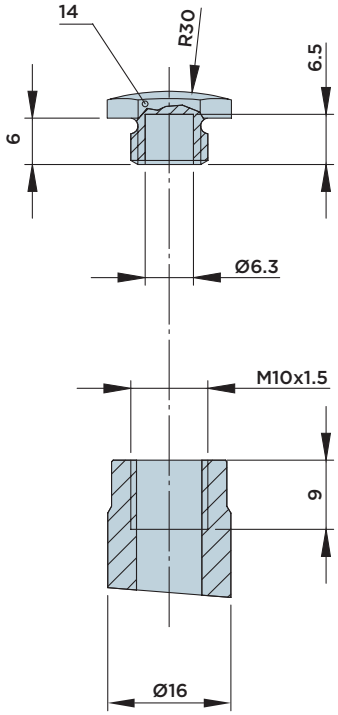



FORCE/PRESSURE/DEFLECTION DIAGRAM

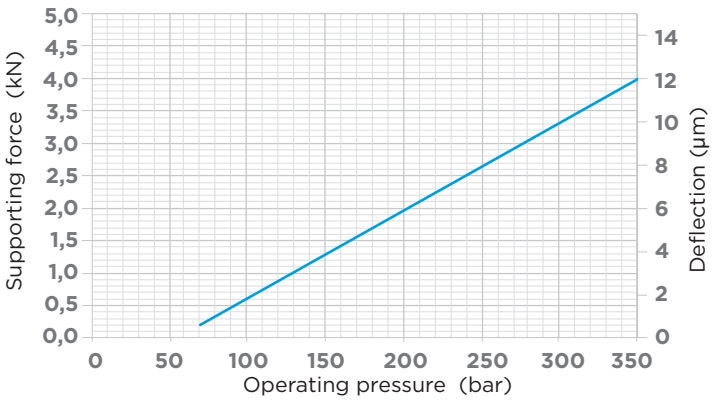

INSTALLATION DIMENSIONS

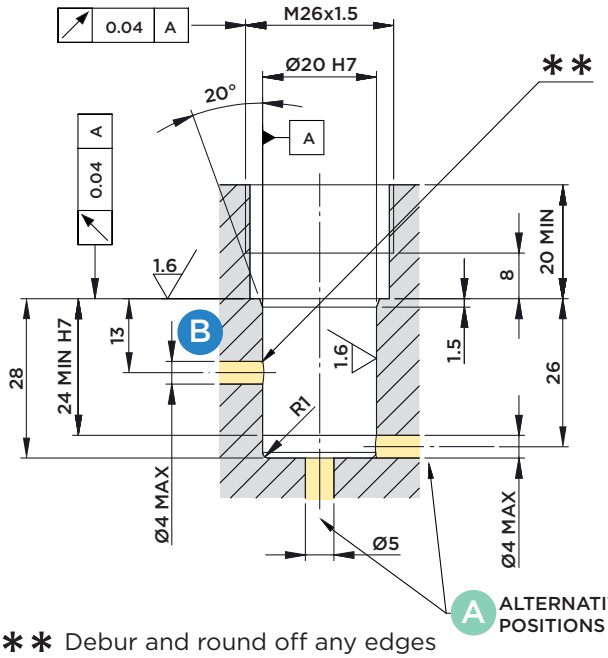

** Debur and round off any edges

Note:
The maximum admissible flow rate amounts to 1.5 l/min.

Contact force:
- Standard 15÷35 N

Included in the scope of supply:
- Sealing ring Ø20.5xØ24x1.5

Material:
- Piston/rod: Case-hardened steel, ground.
- Body: Free machining steel, nitrocarburized.